

1x1 HDMI 1.3 Repeater

Operation Manual



TABLE OF CONTENTS

1. Introduction	1
2. Features	1
3. Operation Controls and Functions	2
3.1 Front Panel.....	2
3.2 Rear Panel.....	2
4. Connection and Installation	3
5. Specifications	3
6. Cypress HDMI v1.3 Series	6

1. Introduction


The HDMI v1.3 Distribution Amplifier Series is the most advanced solution to HDMI signal distribution. Each product in this series is compatible to HDMI v1.3 specifications, a cutting edge technology which defines the support to transfer Deep Color (10-bit and 12-bit) video and new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio, with a high bandwidth up to 225MHz (6.75Gbps). Besides splitting and distributing, the HDMI v1.3 DA series also does signal amplification and equalization, so as to provide high performance I/O of audio and video. Each of the buffered output can run up to 30 meters and can be cascaded.

2. Features

- HDMI 1.3, HDCP1.1 and DVI1.0 compliant Receiver.
- Deep color video up to 12bit, 1080p@60Hz.
- One HDMI source to connect to one HDMI display simultaneously.
- HDCP keysets allows each output to work independently when connecting to a HDMI display.
- Split a HDMI source to one output without signal loss.
- Supports DVI source and DVI display by using HDMI to/from DVI adaptor cable.
- Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission (32-192kHz Fs sample rate).
- Supports a wide range of PC and HDTV resolutions from VGA to UXGA and 480i to 1080p.
- HDMI cable distance test with 1080p resolution: Input/Output source can run up to 30M/5.1CH.
- Full HDCP Compliant.


3. Operation Controls and Functions

3.1 Front Panel

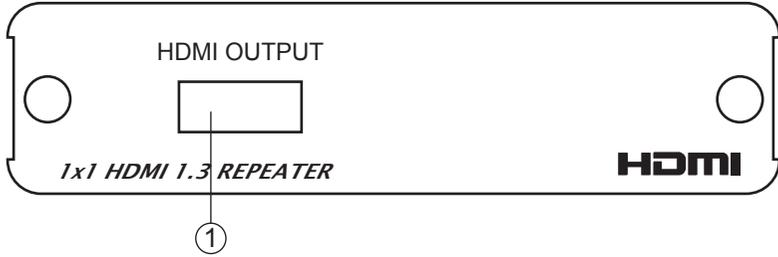


- ① HDMI Output: Connect output port to the HDMI display.

3.2 Rear Panel

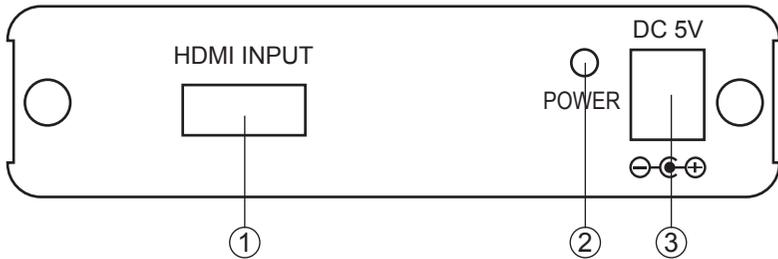

- ① HDMI Input: Connect input port to the HDMI or DVI output of your source equipment such as DVD player or set-top-box.
- ② POWER Indicator: The power LED will illuminate when power on.
- ③ Power: Plug the 5V DC power supply into this unit and connect the adaptor to AC wall outlet.

4. Connection and Installation

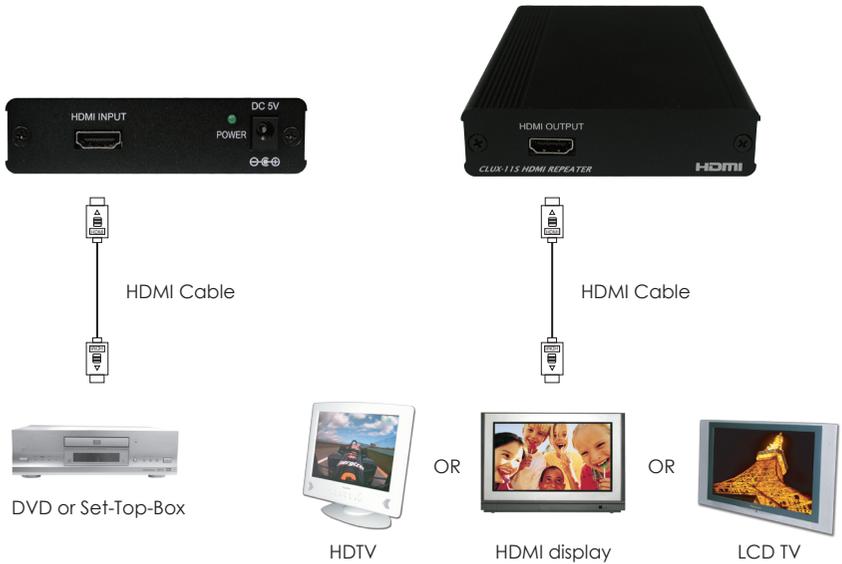

5. Specifications

Frequency bandwidth	2.25Gbps (single link)
Input port	1 x HDMI female port (Type A connector)
Output port	1 x HDMI female port
Power Supply	5VDC/2.6A (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	100(W) x 147(D) x 25(H)
Weight(g)	300
Chassis Material	Aluminum
Silk Skin Color	Black
Operating Temperature	Operating from 0°C ~ 40°C